
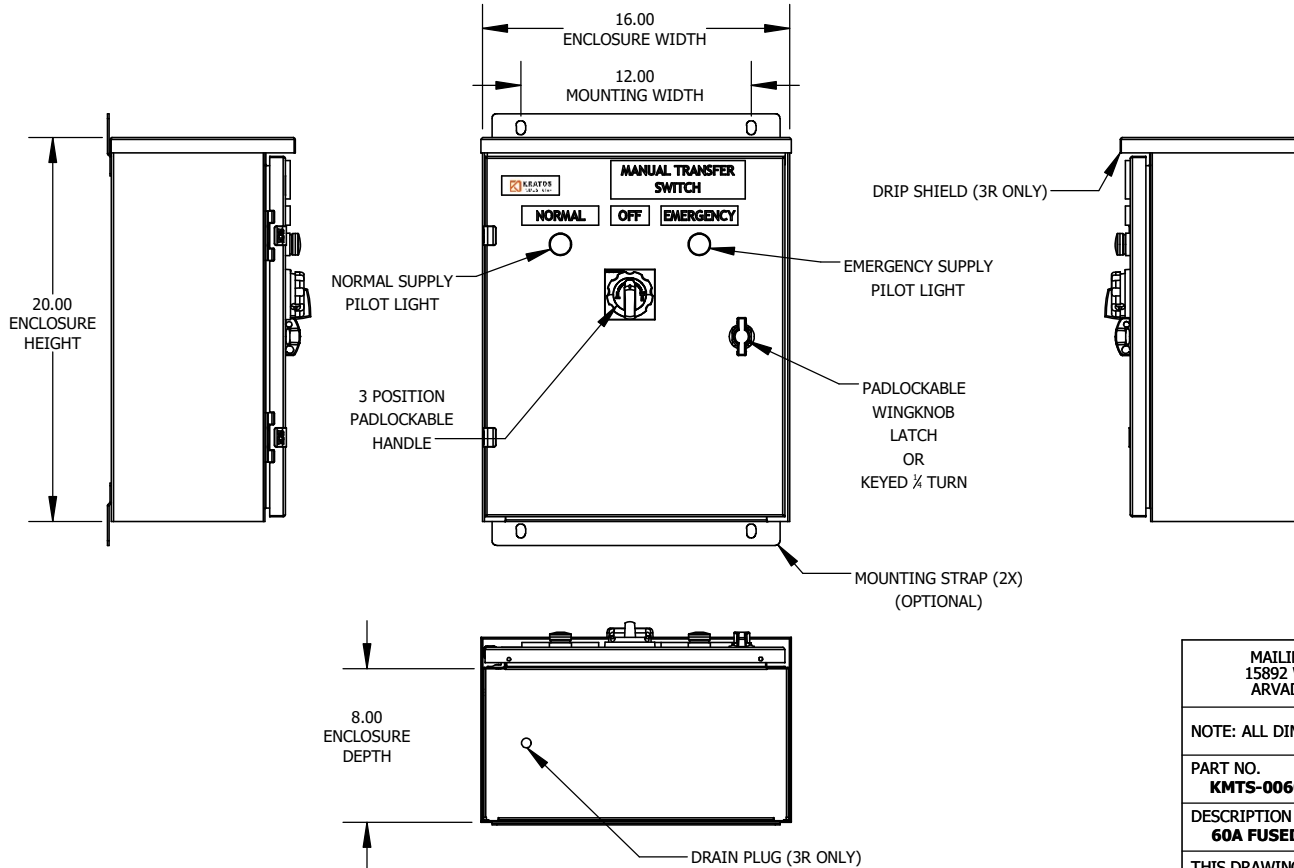
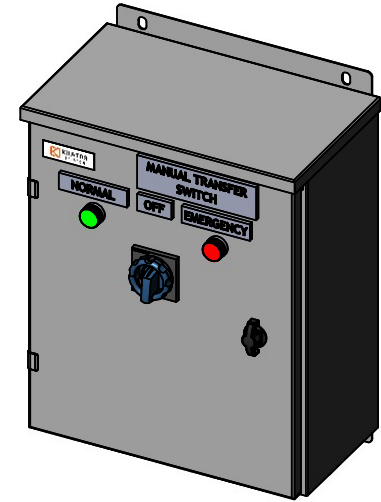


SPECIFICATIONS
MAX VOLTAGE - 600VAC 3 Ø
RATED CURRENT - 60 A
STANDARDS - UL508A
ENCLOSURE RATING - SEE CHART
DURABILITY - 100,000 CYCLES
LINE SIDE CABLE BEND RADIUS - 3.00"
LOAD SIDE CABLE BEND RADIUS - 3.00"



PART NUMBER	TYPE	FINISH	SERVICE ENTRANCE RATED
KMTS-0060-XX-01-02-01-01	1	ANSI 61	YES
KMTS-0060-XX-02-02-01-01	3R	ANSI 61	YES
KMTS-0060-XX-03-02-01-01	4X	304 SS STD. (316 SS OPTIONAL)	YES
KMTS-0060-XX-01-02-01-02	1	ANSI 61	NO
KMTS-0060-XX-02-02-01-02	3R	ANSI 61	NO
KMTS-0060-XX-03-02-01-02	4X	304 SS STD. (316 SS OPTIONAL)	NO


REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	5/11/2020

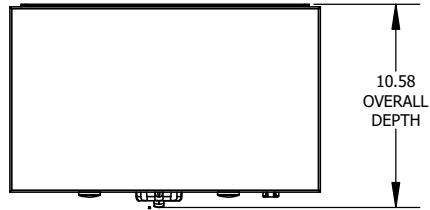

MAILING ADDRESS: 15892 W. 74TH AVE. ARVADA, CO 80007		
NOTE: ALL DIMENSIONS IN INCHES		
PART NO. KMTS-0060-XX-XX-02-01-XX	DRAWN BY JUSTIN HILBERT	SHEET 1 of 2
DESCRIPTION 60A FUSED MTS		PROJECT
THIS DRAWING IS CONSIDERED COMPANY CONFIDENTIAL AND PROPERTY OF KRATOS INDUSTRIES, LLC AND SHALL NOT BE USED WITHOUT WRITTEN CONSENT.		

REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	5/11/2020

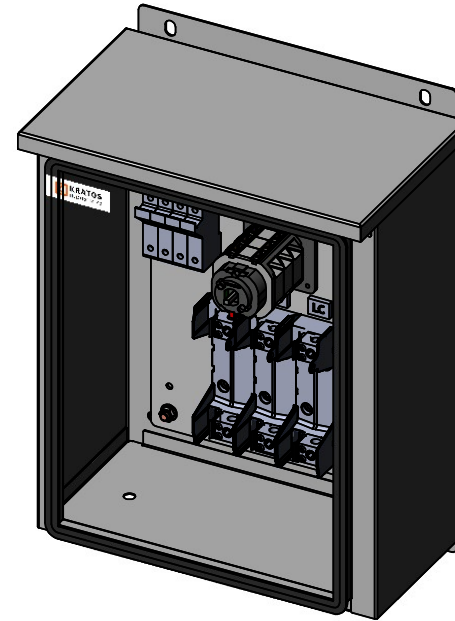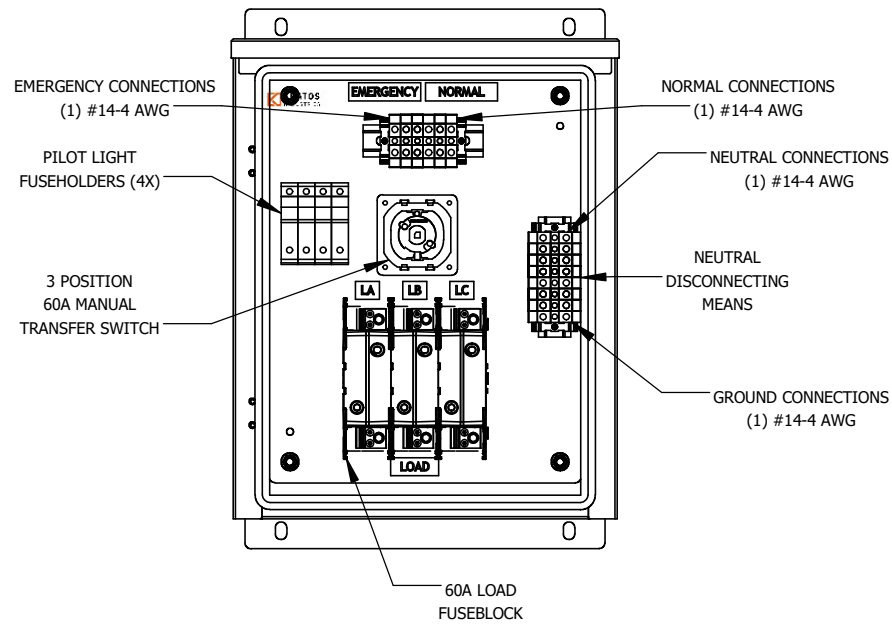

MAILING ADDRESS: 15892 W. 74TH AVE. ARVADA, CO 80007		
NOTE: ALL DIMENSIONS IN INCHES		
PART NO. KMTS-0060-XX-XX-02-01-XX	DRAWN BY JUSTIN HILBERT	SHEET 2 of 2
DESCRIPTION 60A FUSED MTS		PROJECT
THIS DRAWING IS CONSIDERED COMPANY CONFIDENTIAL AND PROPERTY OF KRATOS INDUSTRIES, LLC AND SHALL NOT BE USED WITHOUT WRITTEN CONSENT.		