


REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	7/1/2020

SPECIFICATIONS
 MAX VOLTAGE - 600VAC 3 Ø
 RATED CURRENT - 400 A
 STANDARDS - UL508A
 ENCLOSURE RATING - **SEE CHART**
 DURABILITY - 6050 CYCLES
 LINE SIDE CABLE BEND RADIUS - 20.00"
 LOAD SIDE CABLE BEND RADIUS - 19.50"



PART NUMBER	TYPE	FINISH
KMTS-0400-XX-01-02-02-02-01	1	ANSI 61
KMTS-0400-XX-02-02-02-02-01	3R	ANSI 61
KMTS-0400-XX-03-02-02-02-01	4X	304 SS STD. (316 SS OPTIONAL)

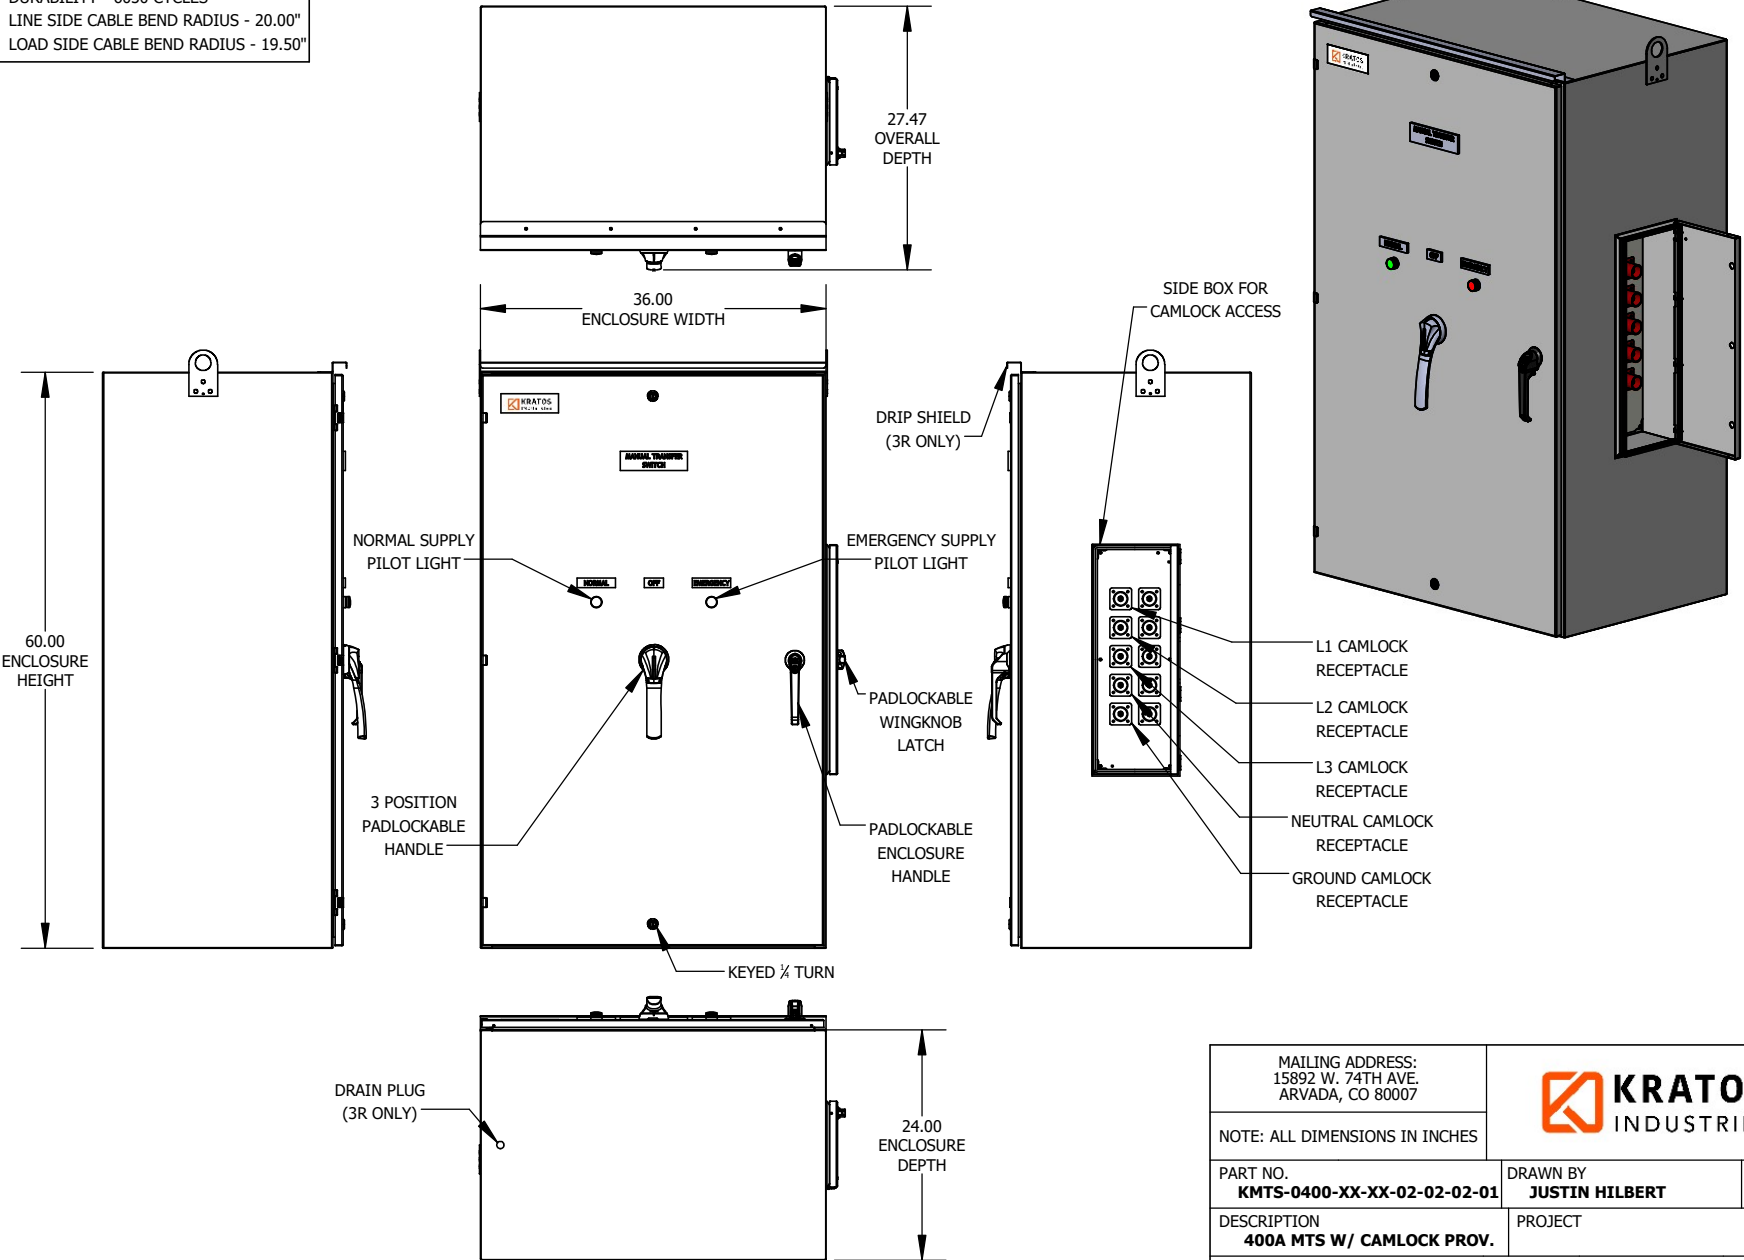

MAILING ADDRESS: 15892 W. 74TH AVE. ARVADA, CO 80007		
NOTE: ALL DIMENSIONS IN INCHES		
PART NO. KMTS-0400-XX-XX-02-02-02-01	DRAWN BY JUSTIN HILBERT	SHEET 1 of 2
DESCRIPTION 400A MTS W/ CAMLOCK PROV.		PROJECT

THIS DRAWING IS CONSIDERED COMPANY CONFIDENTIAL AND PROPERTY OF KRATOS INDUSTRIES, LLC AND SHALL NOT BE USED WITHOUT WRITTEN CONSENT.

REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	7/1/2020

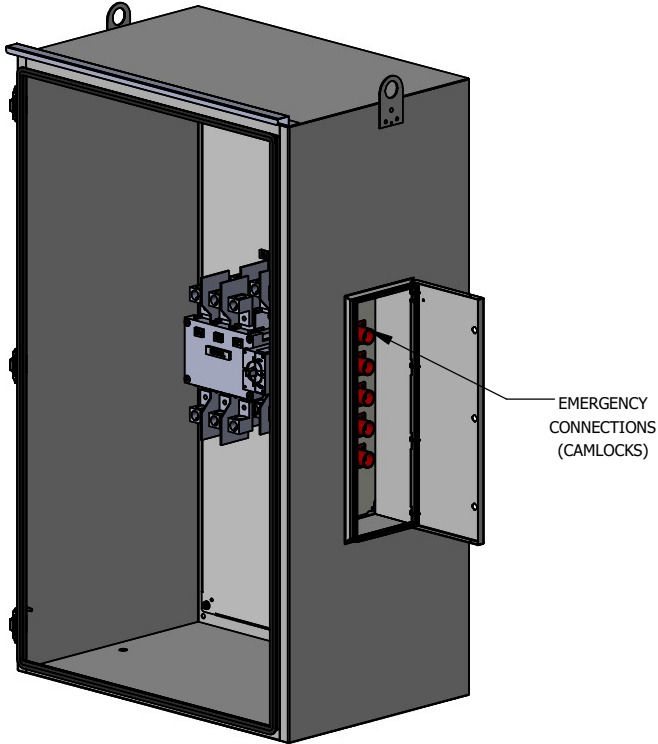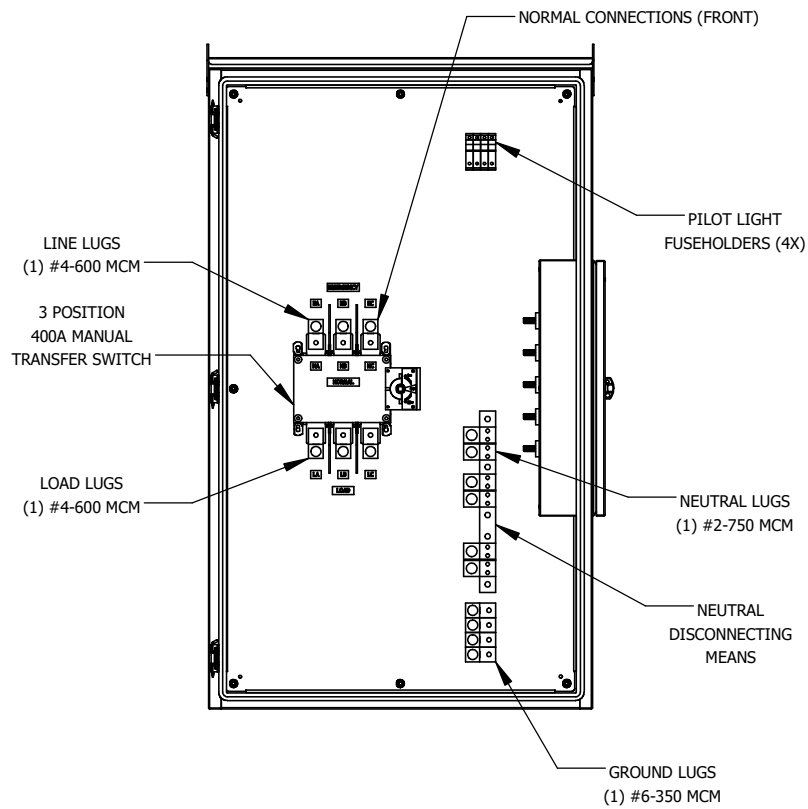

MAILING ADDRESS: 15892 W. 74TH AVE. ARVADA, CO 80007		
NOTE: ALL DIMENSIONS IN INCHES		
PART NO. KMTS-0400-XX-XX-02-02-01	DRAWN BY JUSTIN HILBERT	SHEET 2 of 2
DESCRIPTION 400A MTS W/ CAMLOCK PROV.		PROJECT
THIS DRAWING IS CONSIDERED COMPANY CONFIDENTIAL AND PROPERTY OF KRATOS INDUSTRIES, LLC AND SHALL NOT BE USED WITHOUT WRITTEN CONSENT.		