
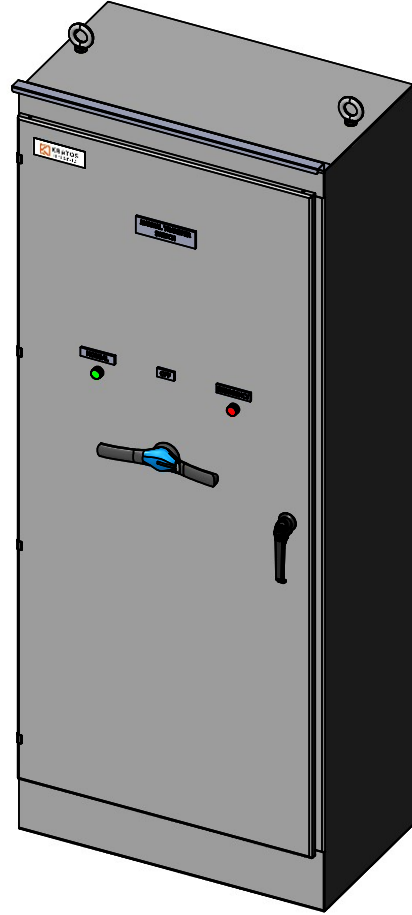
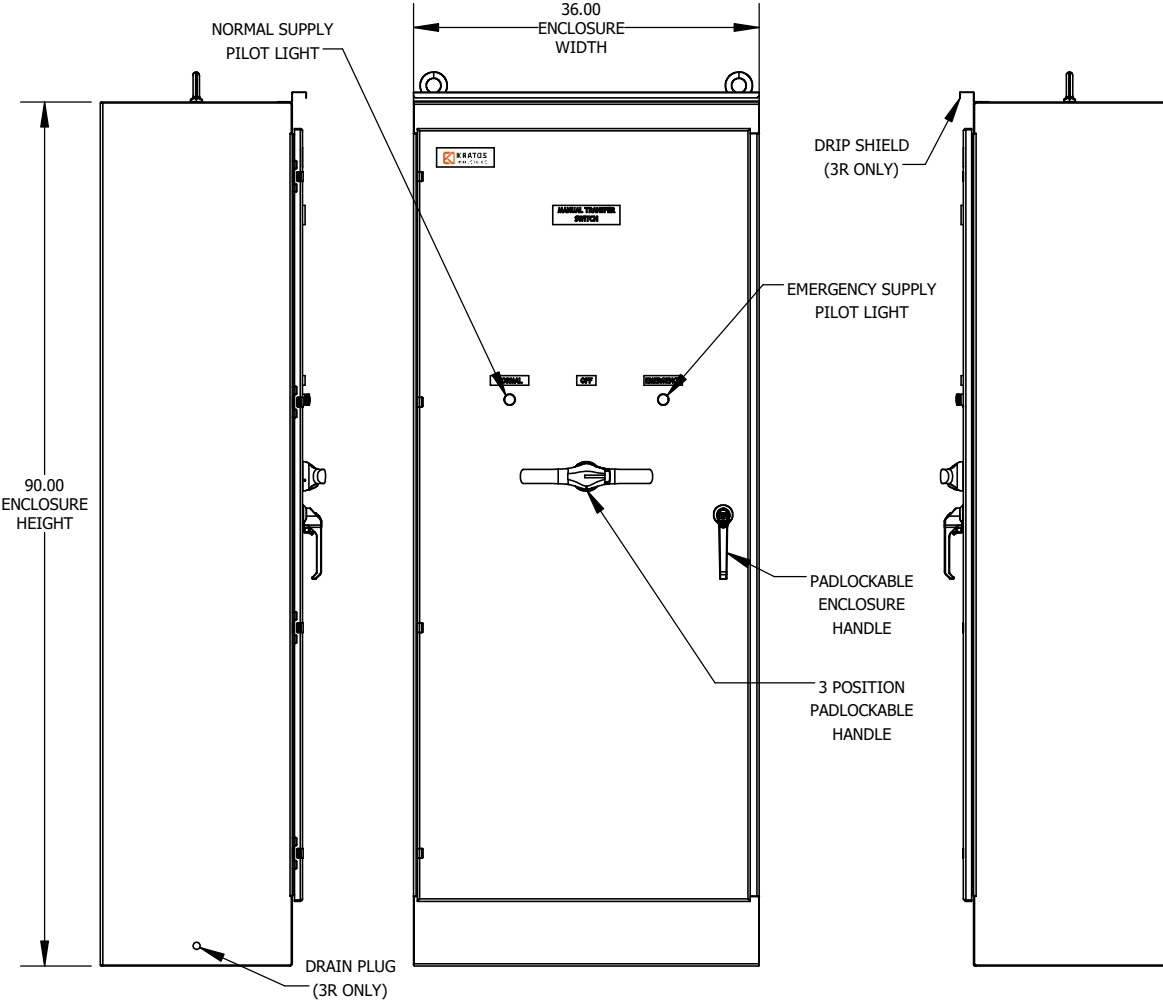


REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	6/30/2020

SPECIFICATIONS
 MAX VOLTAGE - 600VAC 3 Ø
 RATED CURRENT - 1600 A
 STANDARDS - UL508A
 ENCLOSURE RATING - **SEE CHART**
 DURABILITY - 3000 CYCLES
 LINE SIDE CABLE BEND RADIUS - 26.00"
 LOAD SIDE CABLE BEND RADIUS - 42.25"



PART NUMBER	TYPE	FINISH
KMTS-1600-XX-01-02-02-02	1	ANSI 61
KMTS-1600-XX-02-02-02-02	3R	ANSI 61
KMTS-1600-XX-03-02-02-02	4X	304 SS STD. (316 SS OPTIONAL)

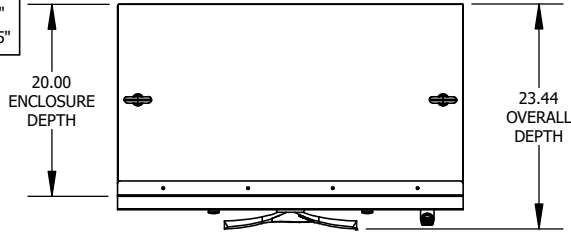

MAILING ADDRESS: 15892 W. 74TH AVE. ARVADA, CO 80007		
NOTE: ALL DIMENSIONS IN INCHES		
PART NO. KMTS-1600-XX-XX-02-02-02	DRAWN BY JUSTIN HILBERT	SHEET 1 of 2
DESCRIPTION 1600A NON-FUSED MTS		PROJECT

THIS DRAWING IS CONSIDERED COMPANY CONFIDENTIAL AND PROPERTY OF KRATOS INDUSTRIES, LLC AND SHALL NOT BE USED WITHOUT WRITTEN CONSENT.

REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	6/30/2020

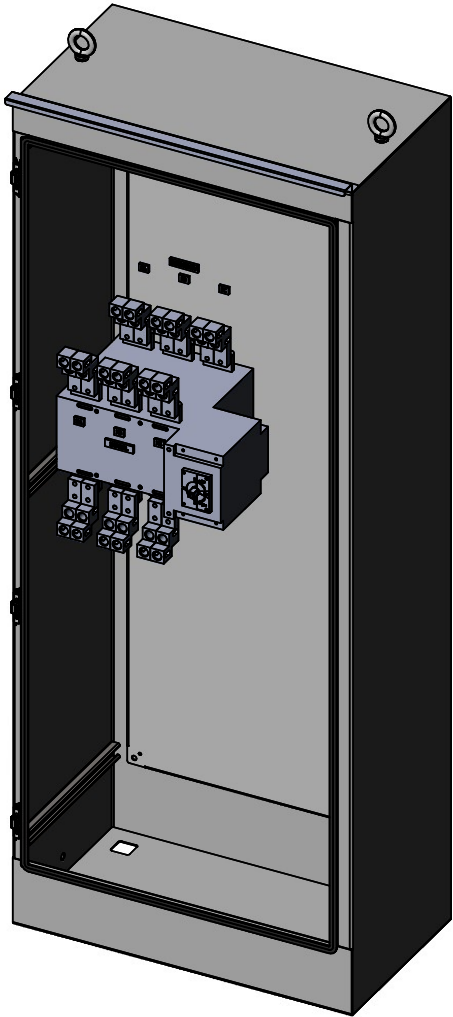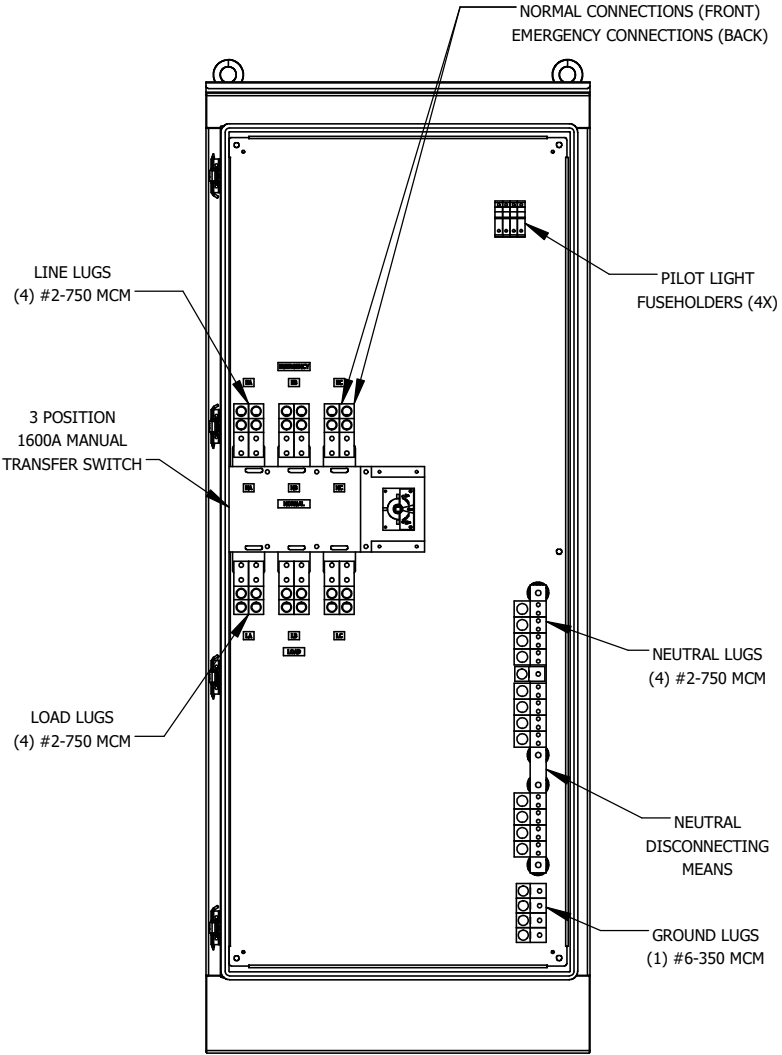

MAILING ADDRESS:
15892 W. 74TH AVE.
ARVADA, CO 80007



NOTE: ALL DIMENSIONS IN INCHES

PART NO.
KMTS-1600-XX-XX-02-02-02

DRAWN BY
JUSTIN HILBERT

SHEET
2 of 2

DESCRIPTION
1600A NON-FUSED MTS

PROJECT

THIS DRAWING IS CONSIDERED COMPANY CONFIDENTIAL AND PROPERTY OF KRATOS INDUSTRIES, LLC AND SHALL NOT BE USED WITHOUT WRITTEN CONSENT.