
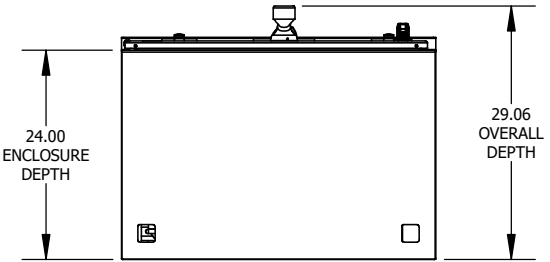
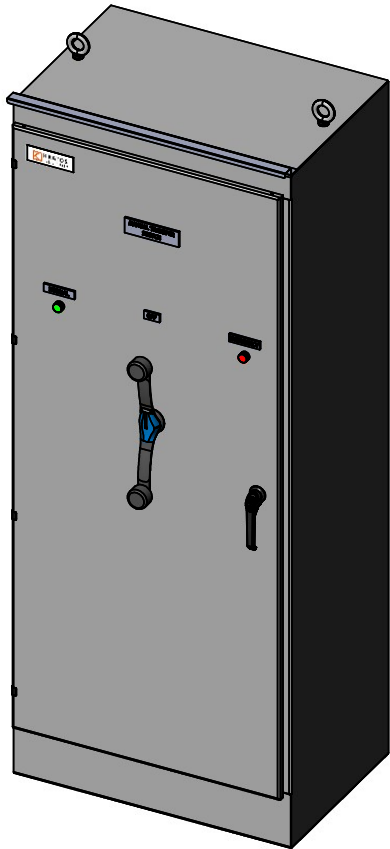


**SPECIFICATIONS**  
 MAX VOLTAGE - 600VAC 3 Ø  
 RATED CURRENT - 2000 A  
 STANDARDS - UL508A  
 ENCLOSURE RATING - **SEE CHART**  
 DURABILITY - 3000 CYCLES  
 LINE SIDE CABLE BEND RADIUS - 26.75"  
 LOAD SIDE CABLE BEND RADIUS - 24.25"



PART NUMBER	TYPE	FINISH	SERVICE ENTRANCE RATED
KMTS-2000-XX-01-02-01-01	1	ANSI 61	YES
KMTS-2000-XX-02-02-01-01	3R	ANSI 61	YES
KMTS-2000-XX-03-02-01-01	4X	304 SS STD. (316 SS OPTIONAL)	YES
KMTS-2000-XX-01-02-01-02	1	ANSI 61	NO
KMTS-2000-XX-02-02-01-02	3R	ANSI 61	NO
KMTS-2000-XX-03-02-01-02	4X	304 SS STD. (316 SS OPTIONAL)	NO

REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	8/10/2020

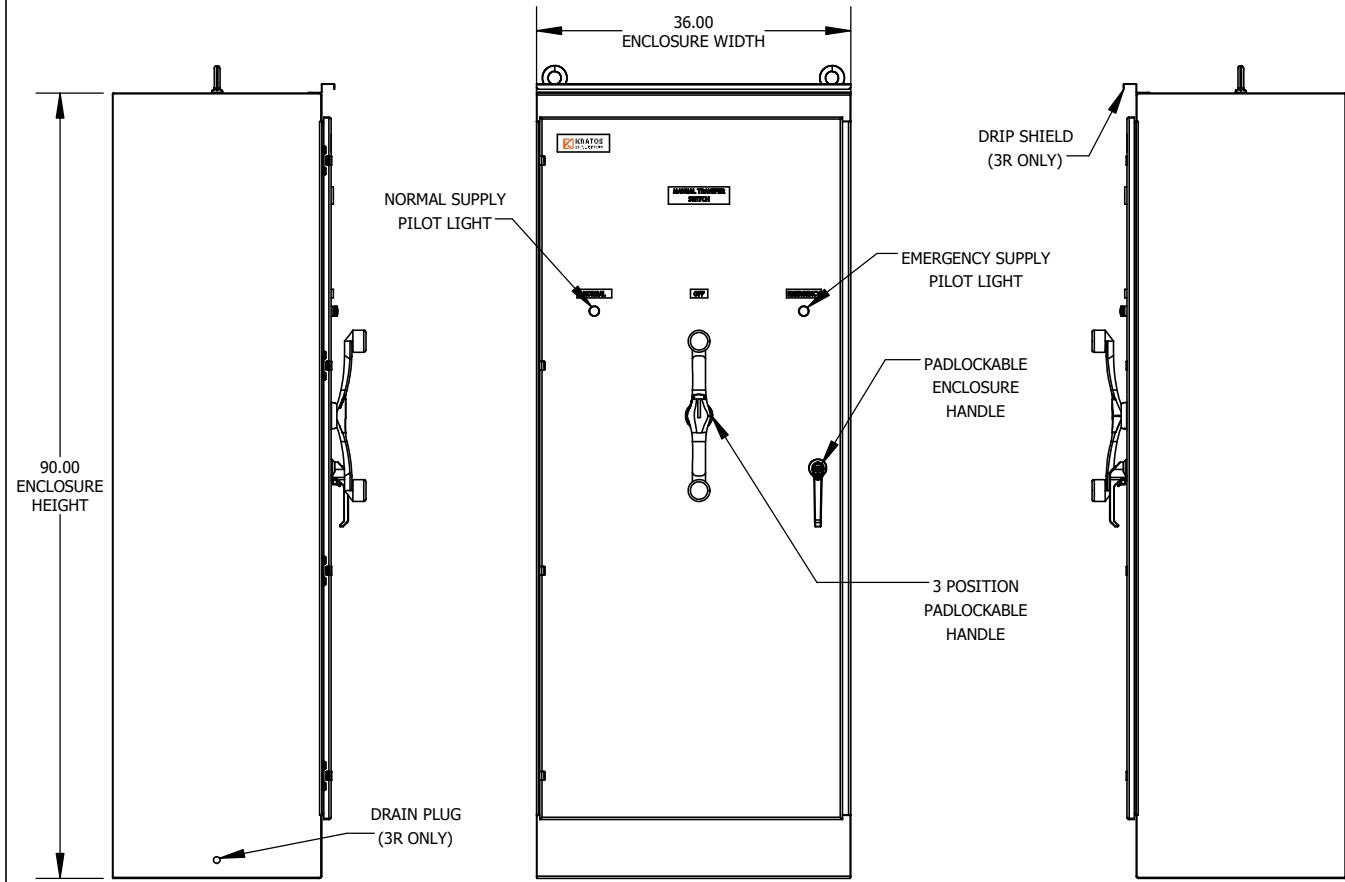

MAILING ADDRESS: 15892 W. 74TH AVE. ARVADA, CO 80007		
NOTE: ALL DIMENSIONS IN INCHES		
PART NO. <b>KMTS-2000-XX-XX-02-01-XX</b>	DRAWN BY <b>JUSTIN HILBERT</b>	SHEET <b>1 of 2</b>
DESCRIPTION <b>2000A FUSED MTS</b>		PROJECT
THIS DRAWING IS CONSIDERED COMPANY CONFIDENTIAL AND PROPERTY OF KRATOS INDUSTRIES, LLC AND SHALL NOT BE USED WITHOUT WRITTEN CONSENT.		

REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	8/10/2020

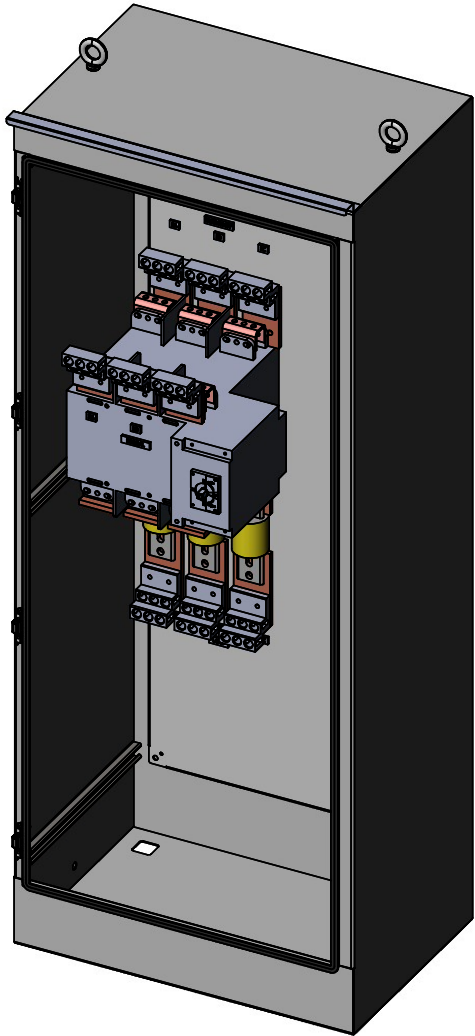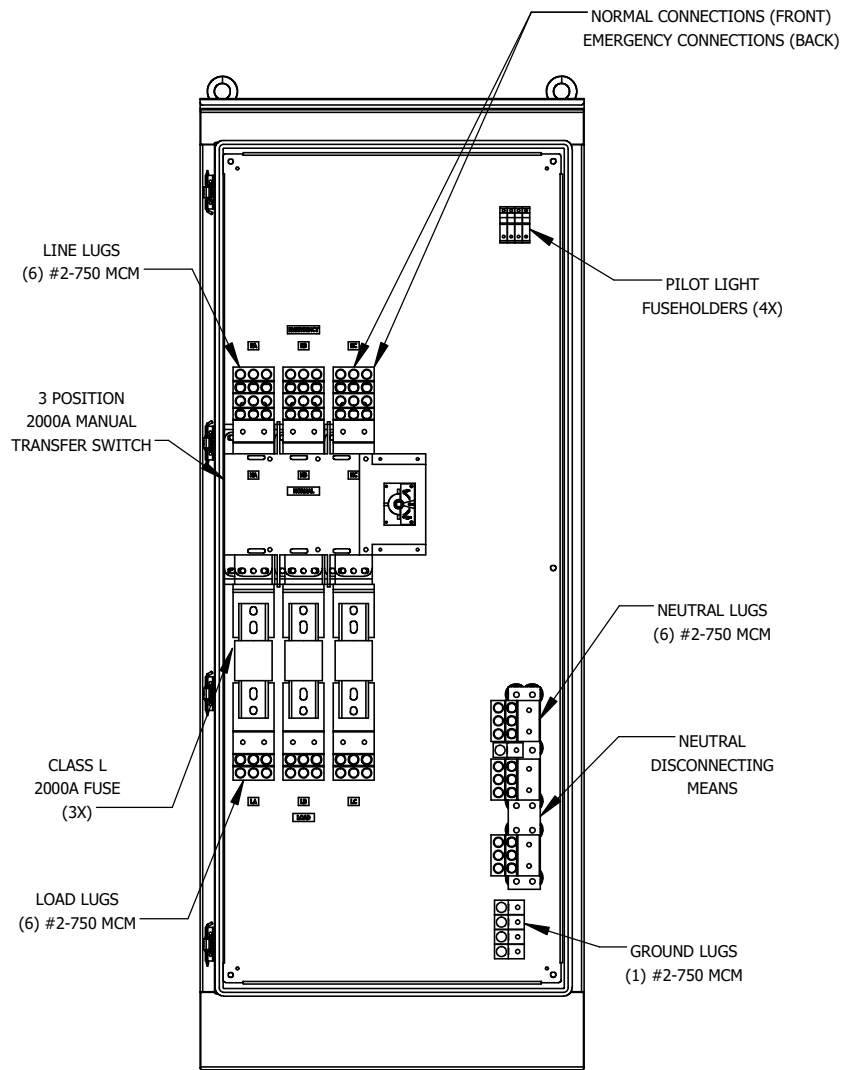

MAILING ADDRESS:  
15892 W. 74TH AVE.  
ARVADA, CO 80007



NOTE: ALL DIMENSIONS IN INCHES

PART NO.  
**KMTS-2000-XX-XX-02-01-XX**

DRAWN BY  
**JUSTIN HILBERT**

SHEET  
**2 of 2**

DESCRIPTION  
**2000A FUSED MTS**

PROJECT

THIS DRAWING IS CONSIDERED COMPANY CONFIDENTIAL AND PROPERTY OF KRATOS INDUSTRIES, LLC AND SHALL NOT BE USED WITHOUT WRITTEN CONSENT.