
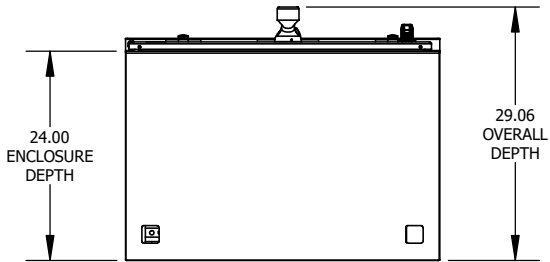
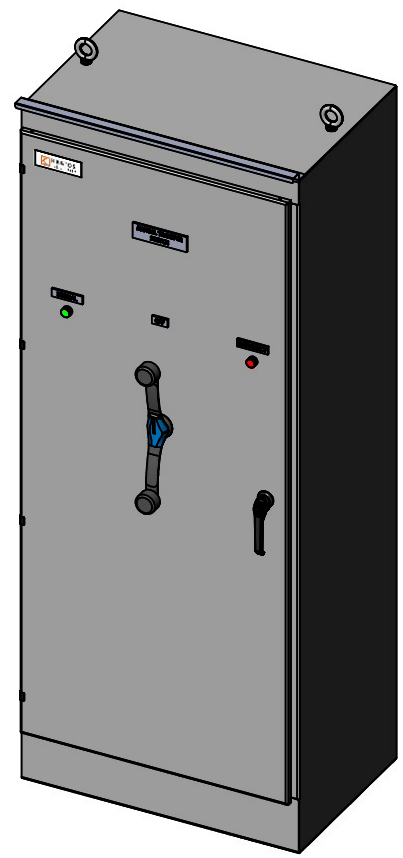


REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	8/10/2020

**SPECIFICATIONS**  
 MAX VOLTAGE - 600VAC 3 Ø  
 RATED CURRENT - 2500 A  
 STANDARDS - UL508A  
 ENCLOSURE RATING - **SEE CHART**  
 DURABILITY - 3000 CYCLES  
 LINE SIDE CABLE BEND RADIUS - 24.25"  
 LOAD SIDE CABLE BEND RADIUS - 41.61"

PART NUMBER	TYPE	FINISH
KMTS-2500-XX-01-02-02-02	1	ANSI 61
KMTS-2500-XX-02-02-02-02	3R	ANSI 61
KMTS-2500-XX-03-02-02-02	4X	304 SS STD. (316 SS OPTIONAL)

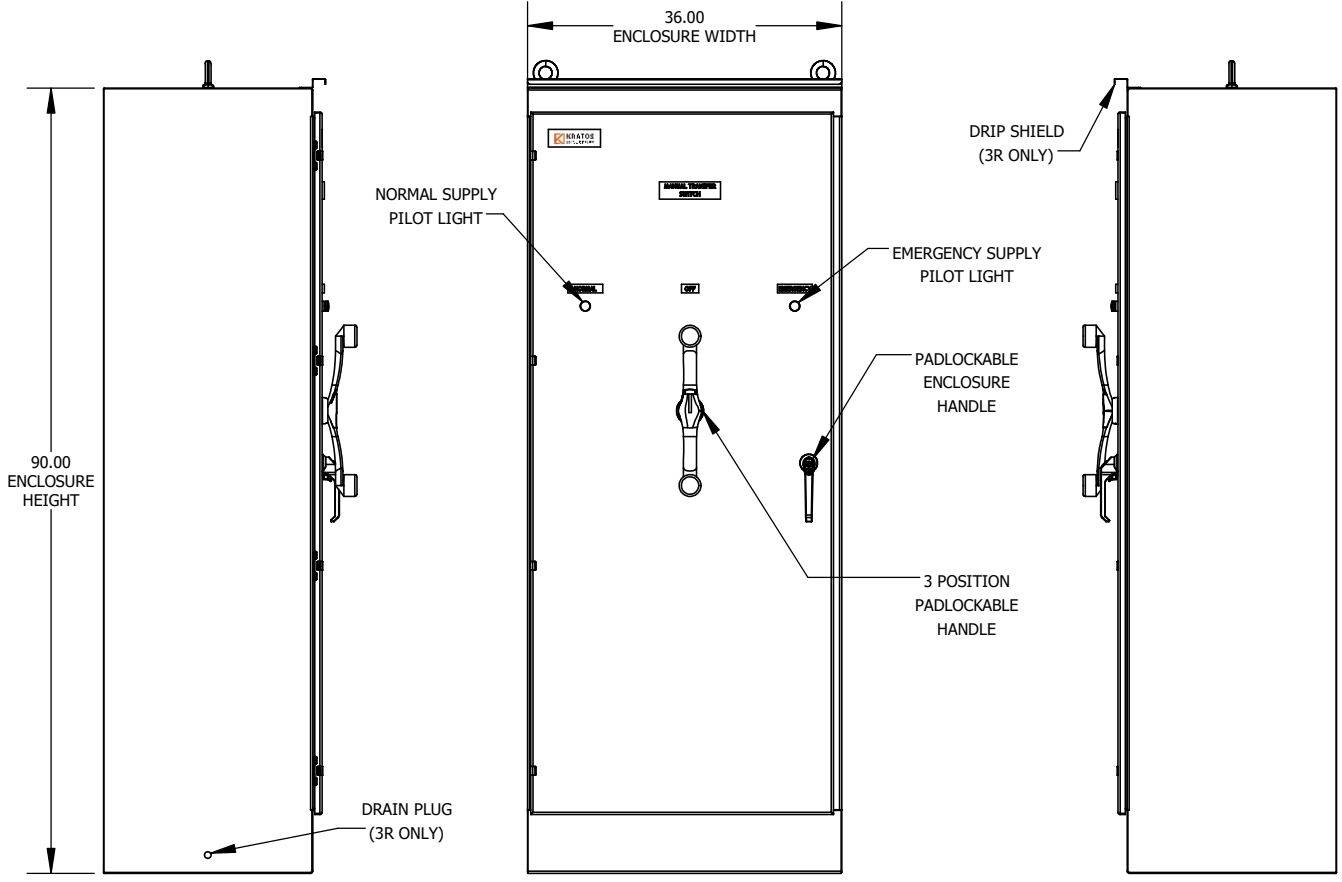



MAILING ADDRESS:  
 15892 W. 74TH AVE.  
 ARVADA, CO 80007



NOTE: ALL DIMENSIONS IN INCHES		
PART NO. <b>KMTS-2500-XX-XX-02-02-02</b>	DRAWN BY <b>JUSTIN HILBERT</b>	SHEET <b>1 of 2</b>
DESCRIPTION <b>2500A NON-FUSED MTS</b>	PROJECT	

THIS DRAWING IS CONSIDERED COMPANY CONFIDENTIAL AND PROPERTY OF KRATOS INDUSTRIES, LLC AND SHALL NOT BE USED WITHOUT WRITTEN CONSENT.

REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	8/10/2020

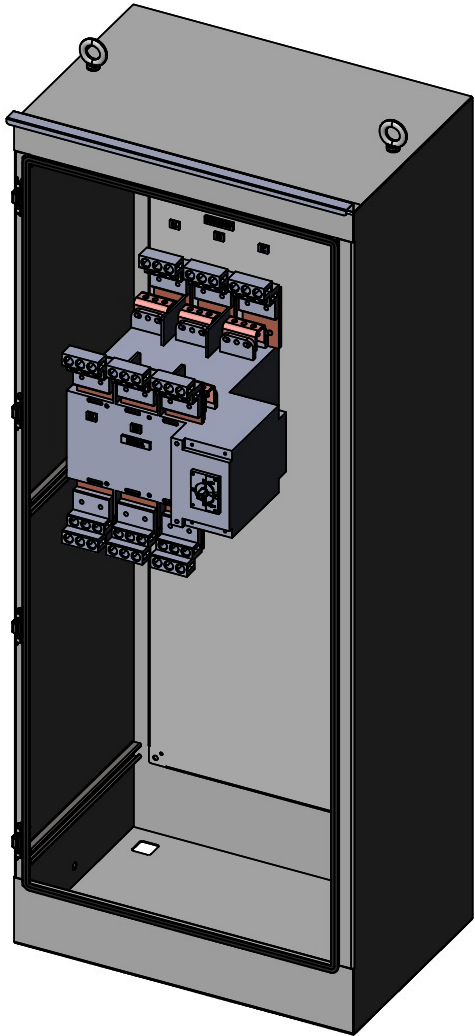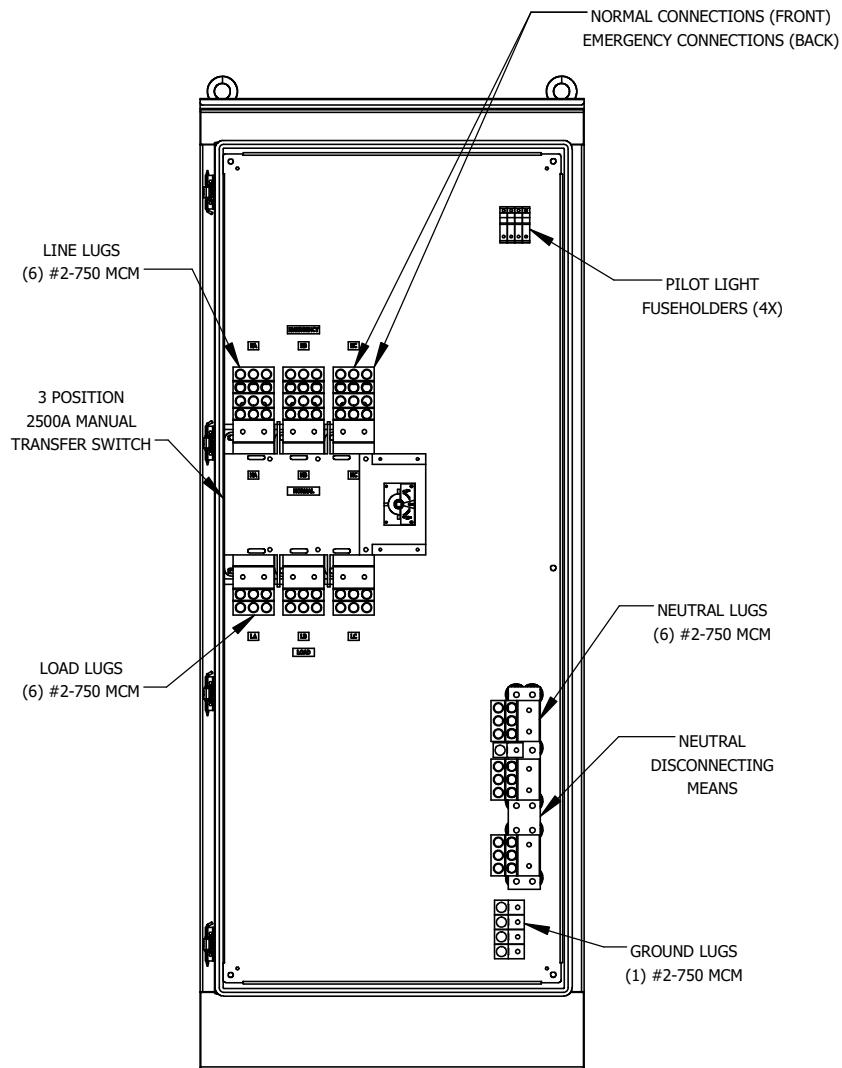

MAILING ADDRESS:  
15892 W. 74TH AVE.  
ARVADA, CO 80007

NOTE: ALL DIMENSIONS IN INCHES



PART NO.  
**KMTS-2500-XX-XX-02-02-02**

DRAWN BY  
**JUSTIN HILBERT**

SHEET  
**2 of 2**

DESCRIPTION  
**2500A NON-FUSED MTS**

PROJECT

THIS DRAWING IS CONSIDERED COMPANY CONFIDENTIAL AND PROPERTY OF KRATOS INDUSTRIES, LLC AND SHALL NOT BE USED WITHOUT WRITTEN CONSENT.